
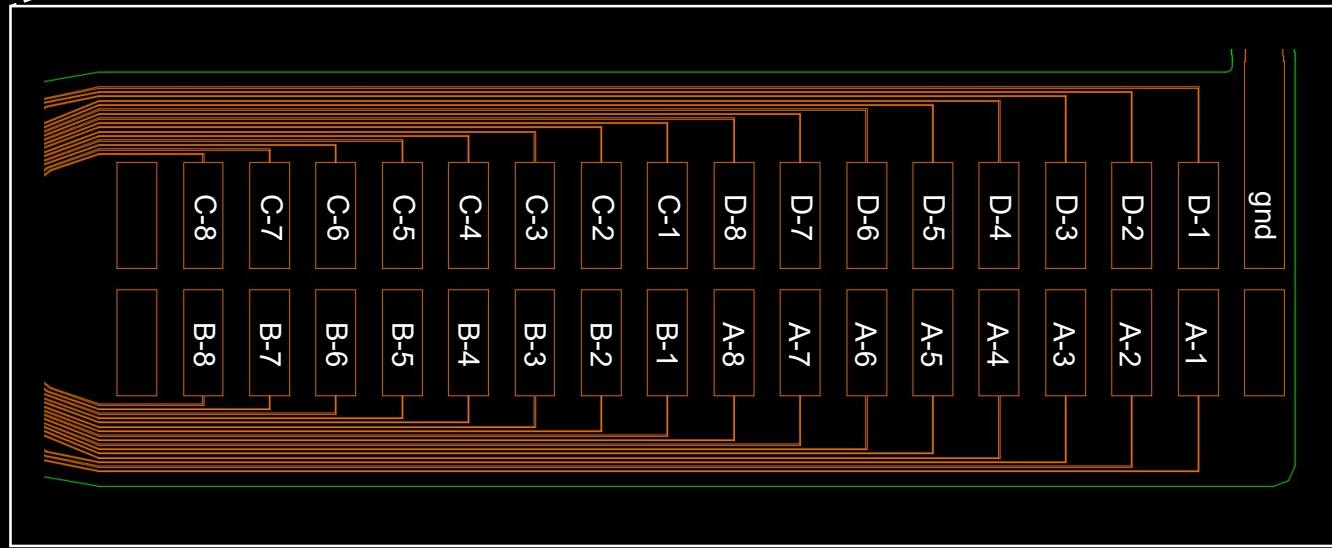
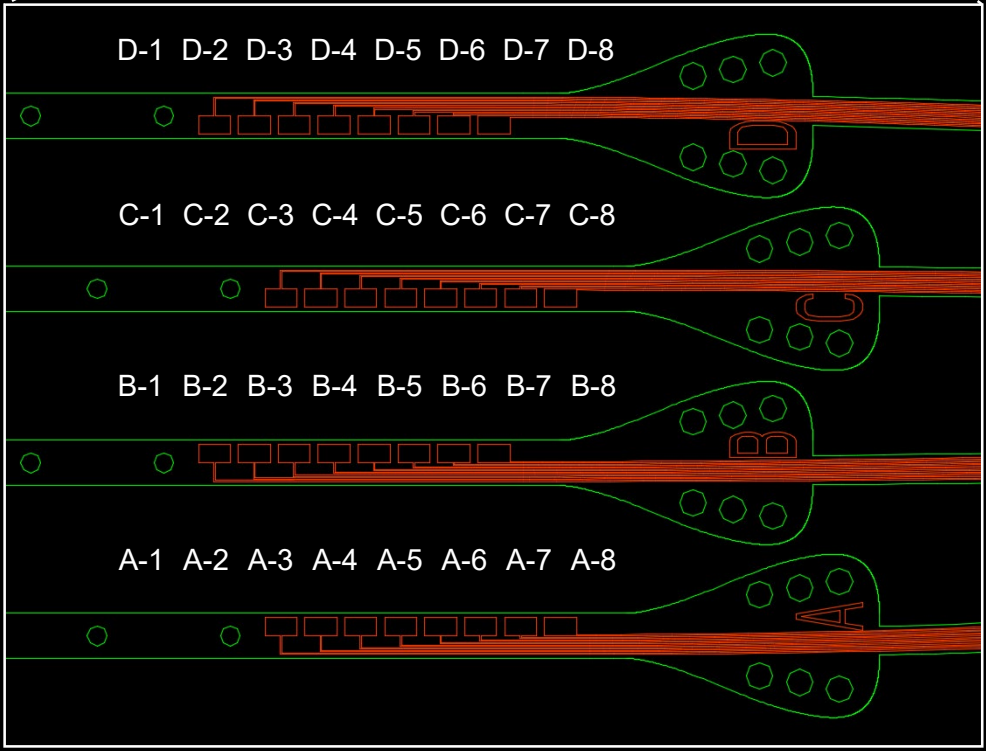


# Pinouts for all RF designs

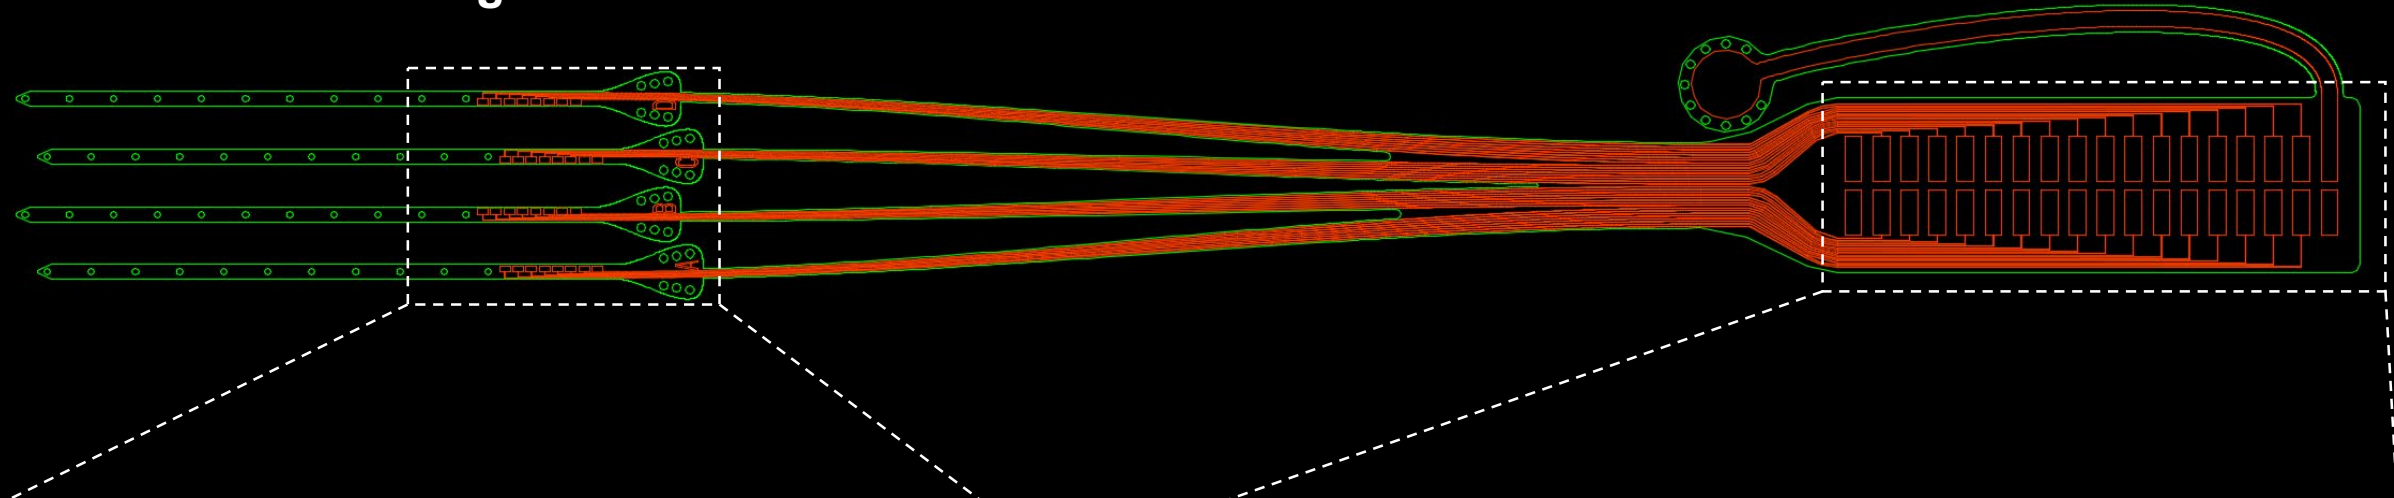

# Pinout for all RF designs


## By Electrode

Electrode	Intan RHD2132	Intan RHD2216
A-1	24	12+
A-2	25	12-
A-3	26	13+
A-4	27	13-
A-5	28	14+
A-6	29	14-
A-7	30	15+
A-8	31	15-
B-1	0	0+
B-2	1	0-
B-3	2	1+
B-4	3	1-
B-5	4	2+
B-6	5	2-
B-7	6	3+
B-8	7	3-
C-1	15	7-
C-2	14	7+
C-3	13	6-
C-4	12	6+
C-5	11	5-
C-6	10	5+
C-7	9	4-
C-8	8	4+
D-1	23	11-
D-2	22	11+
D-3	21	10-
D-4	20	10+
D-5	19	9-
D-6	18	9+
D-7	17	8-
D-8	16	8+


## By Channel

Intan RHD2132	Electrode	Intan RHD2216
0	B-1	0+
1	B-2	0-
2	B-3	1+
3	B-4	1-
4	B-5	2+
5	B-6	2-
6	B-7	3+
7	B-8	3-
8	C-8	4+
9	C-7	4-
10	C-6	5+
11	C-5	5-
12	C-4	6+
13	C-3	6-
14	C-2	7+
15	C-1	7-
16	D-8	8+
17	D-7	8-
18	D-6	9+
19	D-5	9-
20	D-4	10+
21	D-3	10-
22	D-2	11+
23	D-1	11-
24	A-1	12+
25	A-2	12-
26	A-3	13+
27	A-4	13-
28	A-5	14+
29	A-6	14-
30	A-7	15+
31	A-8	15-

# Pinout for all NP designs



# Pinouts for all NP devices

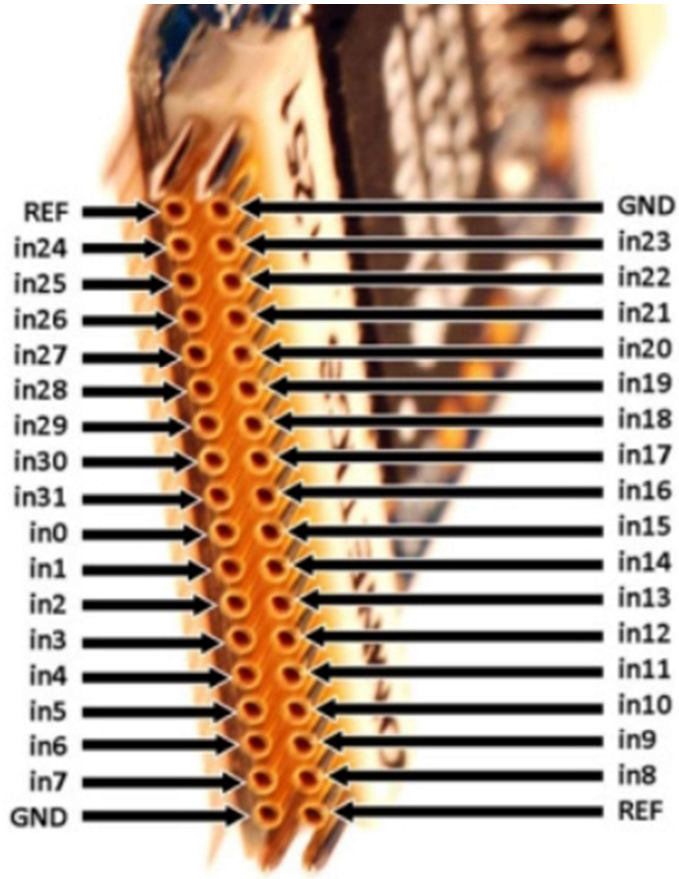

Pin	Intan
1	23
2	22
3	21
4	20
5	19
6	18
7	17
8	16
9	15
10	14
11	13
12	12
13	11
14	10
15	9
16	8
17	24
18	25
19	26
20	27
21	28
22	29
23	30
24	31
25	0
26	1
27	2
28	3
29	4
30	5
31	6
32	7

1	1	1	1	1	1	1	9	8	7	6	5	4	3	2	1
6	5	4	3	2	1	0	2	2	2	2	2	2	1	1	1
3	3	3	2	2	2	2	2	2	2	2	2	1	1	1	
2	1	0	9	8	7	6	5	4	3	2	1	0	9	8	7

## Intan Pinout

8	9	1	1	1	1	1	1	1	1	1	1	2	2	2	2
		0	1	2	3	4	5	6	7	8	9	0	1	2	3
7	6	5	4	3	2	1	0	3	3	2	2	2	2	2	2
								1	0	9	8	7	6	5	4